


## Mito terra fix 190 / 220 datasheet

Linear LED free-standing luminaire with double-sided light emission and a height of 190 cm or 220 cm (body). Asymmetrical light pattern for linear illumination of tables or counters/workstations – wide, anti-glare light beam directed downwards and upwards. An automatic mode is available for Office applications: Measurement of ambient light by »ambient light control« and automatic control of brightness according to the desired settings. The »presence sensor« of the light allows switching by absence or presence in the room. Connection via plug-in power supply (converter) to 230VAC/50Hz mains voltage, head can be removed for maintenance purposes. Power max. 70 W, control via »touchless control« (gesture control at the head), »body sensor« at the luminaire unit, »ambient light control« (ambient light sensor at the head), »presence sensor« (motion sensor at the head) or with Occhio air. The sensors »touchless control« + »body sensor«, »ambient light control«, »presence sensor« can be deactivated via Occhio air app.




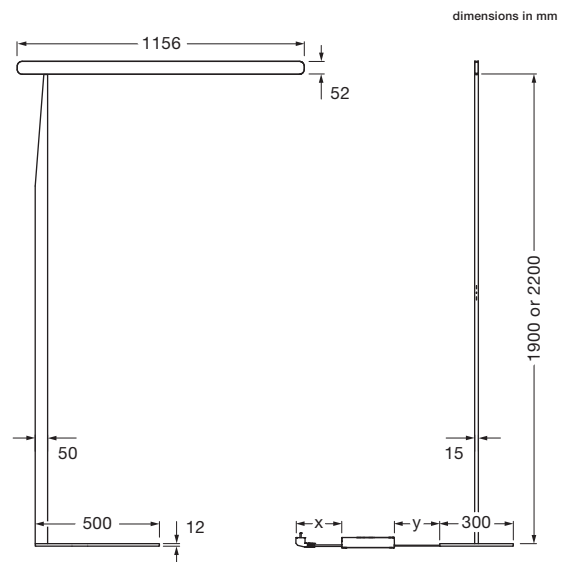


### technical data Mito terra fix 190 / 220

properties	material	head/body aluminium, painted, PVD-coated, optical plastic base powder-coated
	cable length	power supply unit (x): 1 m luminaire (y): 2 m of which 1.5 m are retractable
	weight	Mito terra fix 190: 19.0 kg Mito terra fix 220: 19.5 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom
	body/base	matt silver, matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	A+
	power	70 W (incl. Occhio power supply unit approx. 76 W) / matt black, matt white, matt gold, matt silver 56 W (incl. Occhio power supply unit approx. 63 W) / bronze, rose gold, phantom
	color rendering index	high color; CRI Ra 95
	color temperature	2700–4000 K
electricity	recommended use	residential, office
	dimming	via »touchless control«, »body sensor« or with Occhio air
	connection	230 V AC / 50 Hz
	permitted operating conditions	max. 30°C for indoor use only



## Mito terra fix 190 / 220 lighting effects

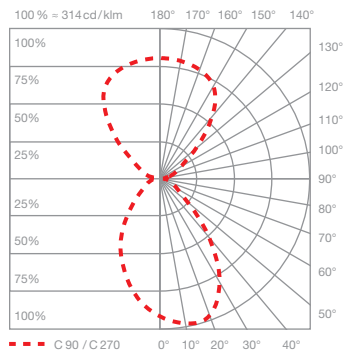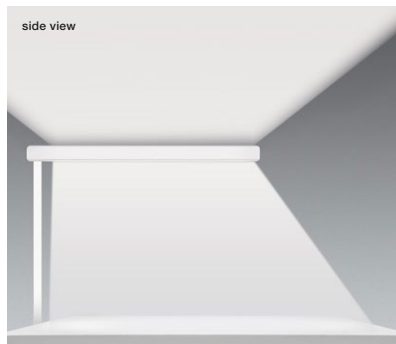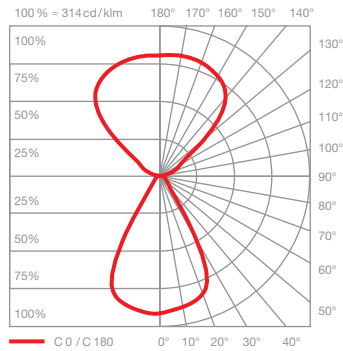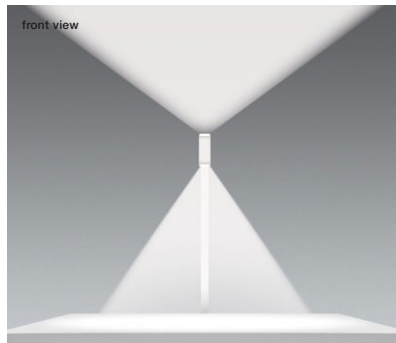

### table (wide)

wide light beam (up and down), beam angle approx. 80° (down)

inserts: wide / flood

luminous flux: high color 70 W\* 4600lm  
high color 56 W\*\* 3600lm

UGR (4H8H) < 19\*\*\*


\* (matt black, matt white, matt gold, matt silver)

\*\* (bronze, rose gold)


\*\*\* For a reliable assessment of glare values in a real application of a luminaire we recommend to carry out an individual calculation which can be prepared by our lighting team (project-support@occhio.de).

## Orientation

**Mito terra fix 190**  
single workstation

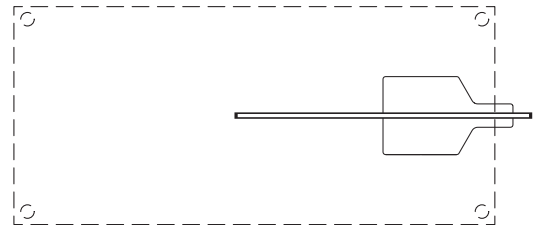

**Mito terra fix 220**  
double workstation

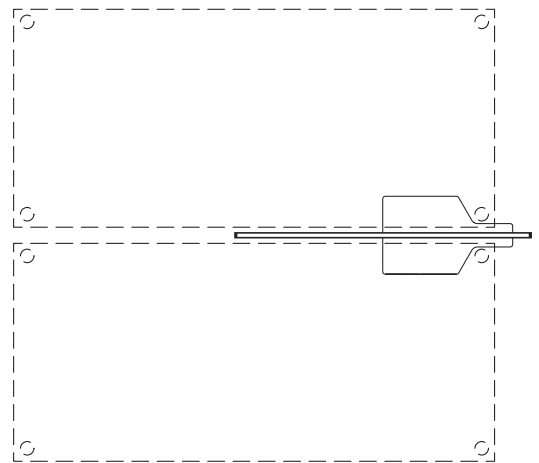

## control options

### Control

#### Mito set box (standard)



sospeso / volo

soffitto / alto flat

sfera



alto & alto side

#### sospeso / volo / sfera:

COLOR (Sensor off)  
adjustable color temperature (4 steps)  
trailing-edge phase cut dimming possible

#### STEP (sospeso / volo)

adjustable color temperature (4 steps)  
adjustable up / downlight ratio (5 steps)  
trailing-edge phase cut dimming possible

#### PRESET (sfera)

color temperature adjustable (4 stages)  
light intensity adjustable (5 stages)

#### SENSOR

»touchless control« (gesture control)  
switching, dimming, up / down fading  
»color tune« (color temperature continuously adjustable)  
no external dimming possible

#### alto / alto side:

COLOR  
adjustable color temperature (4 steps)  
trailing-edge phase cut dimming possible

\*not with sfera

#### Mito »air« box (optional)



sospeso / volo / sfera



alto & alto side



terra / terra 3d  
terra table top/  
soffitto / alto flat



**Occhio air** (Bluetooth control using Occhio air app) or air controller (optional) control of individual luminaires, groups and scenes

#### sospeso / volo / sfera:

##### SENSOR

»air« + »touchless control« (Bluetooth- and gesture control)  
control via »touchless control« and Occhio air app or »air« controller

##### SENSOR OFF

»air«  
control via Occhio air App or »air« controller switching, dimming, up / down fading, »color tune« (color temperature continuously adjustable)

#### terra / terra 3d / terra table top:

»air«, »touchless control« and »body sensor« (Bluetooth- and gesture control)  
control via »touchless control«, »body sensor« and Occhio air App or »air« controller

#### alto / alto slide:

»air« (Bluetooth - control)  
control via Occhio air App or »air« controller switching, dimming  
»color tune« (color temperature continuously adjustable)

##### »ambient light control«

adjustment to ambient light

##### »presence sensor«

presence identification and automatically shutdown by presence sensor

deactivation and adjustable via control and sensor with »air« app

with Mito »air« box no external dimming possible

#### Mito DALI box (optional)



sospeso / volo /  
soffitto alto flat



alto & alto side up



alto & alto side track

#### control via DALI

##### sospeso / volo / soffitto / alto flat:

- color tune adjustable
- adjust continuously dimming
- up + downlight separate controllable (two DALI addresses needed)
- no »touchless control«, no fading
- volo 100 (max. 22,5W uplight/ 22,5W downlight)
- volo 140 (max. 30W uplight/max. 30W downlight)

##### alto / alto side:

- color tune adjustable\*
- continuously dimming

\* DALI controller DALI Device type 8 (DT8) for controlling of the color tune necessary further signs on [www.occhio.de/dali](http://www.occhio.de/dali)