


Mito raggio datasheet

Annular LED arc luminaire with double-sided light emission and a diameter of 60 cm. Connection to 230 V AC / 50 Hz mains voltage via power supply unit (converter), removable head for maintenance purposes.

Luminous power 60 W, control via »touchless control« (gesture control on the head, can be deactivated), via body sensor on the luminaire body (can be deactivated) or with Occhio air

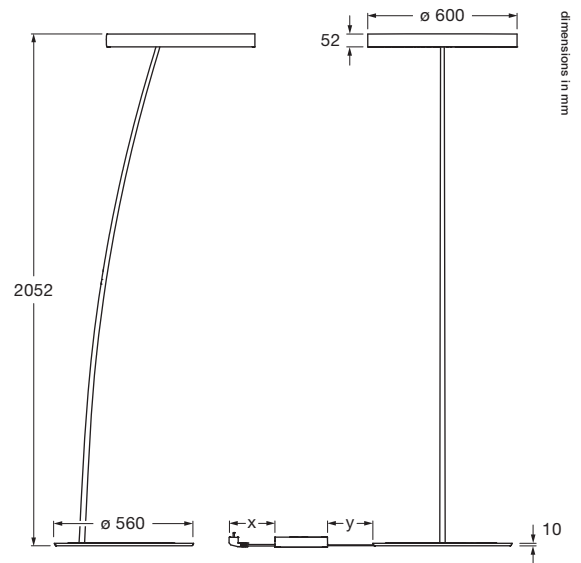

technical data Mito raggio

properties	material	head aluminium, painted, PVD-coated, optical silicone body carbon painted base steel painted
	cable length	power supply unit (x): 1 m luminaire (y): 2 m of which 1.5 m are retractable
	recommended ceiling height	min. 2.4 m
	weight	24.0 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom
	body / base / cable	matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	A +
	power	60 W (incl. Occhio power supply approx. 66 W)
	color rendering index	high color; CRI Ra 95
	color temperature	2700–4000 K
	recommended use	residential
electricity	dimming	via »touchless control« on the head (can be deactivated), via body-sensor on the luminaire body (can be deactivated) or with Occhio air
	connection	230 V AC / 50 Hz
	permitted operating conditions	max. 30°C for indoor use only



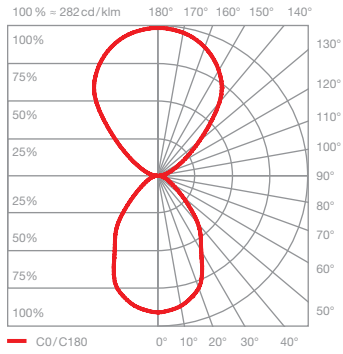



table (wide)

wide light beam (up and down), beam angle approx. 80° (down)

inserts: wide / flood

luminous flux: high color 60 W 3330 lm
 high color 40 W 2220 lm

UGR (4H8H) < 19

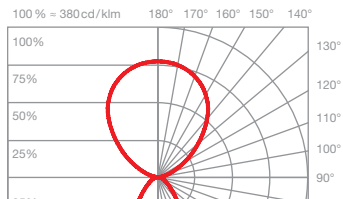

room (narrow)

concentrated | approx. 50°, diffuse upwards

inserts: narrow / diffuse

luminous flux: high color 60 W 3210 lm
 high color 40 W 2140 lm