


Mito sospeso 60 var up datasheet

Annular LED suspended luminaire with double-sided light emission and a diameter of 60 cm. There is a choice of two lighting effects. table (wide) for use over tables – wide light beam downwards and upwards. room (narrow) for freely suspended luminaire lighting – concentrated light beam directed downwards, diffused light directed upwards. The suspension length is continuously adjustable from 50 to 200 cm.

Version with integrated power supply unit for mounting on plaster surfaces; connection to 230V AC mains voltage. Can be controlled via »touchless control« (gesture control on the head), Occhio air or DALI; alternatively, dimmable via a trailing-edge phase cut dimmer*. The color temperature can be continuously controlled via »touchless control«, Occhio air or DALI from 2700 to 4000K or can be preset (2700/3000/3500/4000 K).

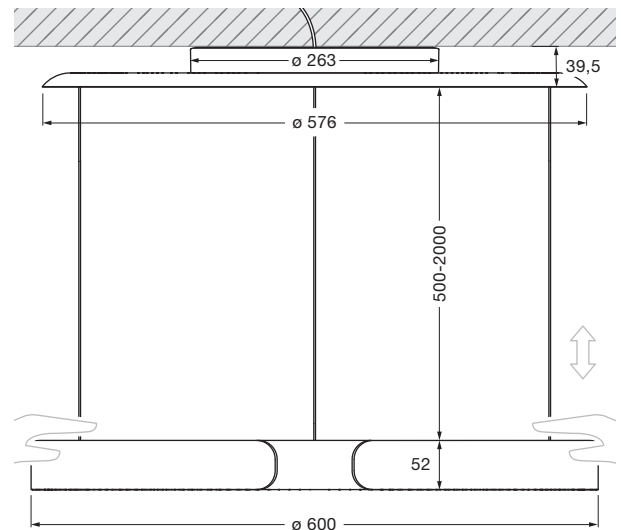

incl. power supply unit (removable)

dimensions in mm

technical data Mito sospeso 60 var up

properties	material	aluminium, painted, PVD-coated steel, plastic, optical silicone, fibreglass
	height adjustment	500–2000 mm (variable)
	weight	6.0 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom
	canopy	matt white
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	A +
	power	60 W (incl. Occhio power supply unit approx. 66 W)
	color rendering index	high color; CRI Ra 95
	color temperature	2700–4000 K
	recommended use	residential and commercial
electricity	dimming	»touchless control«, Occhio air (optional), DALI or via trailing-edge phasecut dimmer*
	connection	230 V AC
	permitted operating conditions	max. 30°C for indoor use only

* For a list of compatible dimmers, see www.occhio.de/dim_en, trailing-edge phasecut dimmer, Occhio air and DALI not combinable



Mito sospeso 60 var up lighting effects

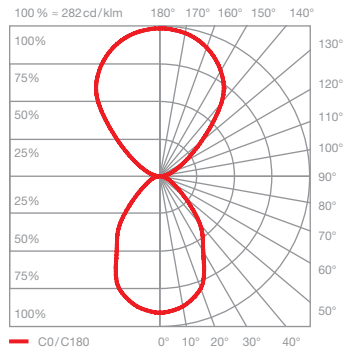
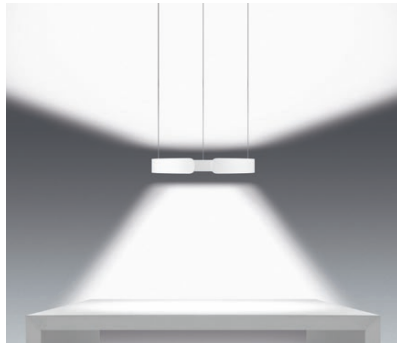




table (wide)

wide light beam (up and down), beam angle approx. 80° (down)

inserts: wide / flood

luminous flux : high color 60 W 3330 lm

UGR (4H8H) < 19

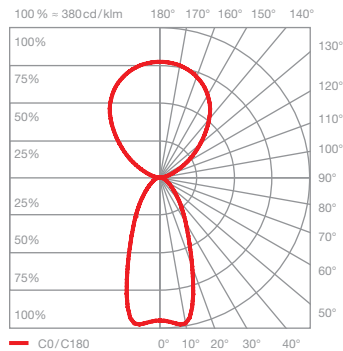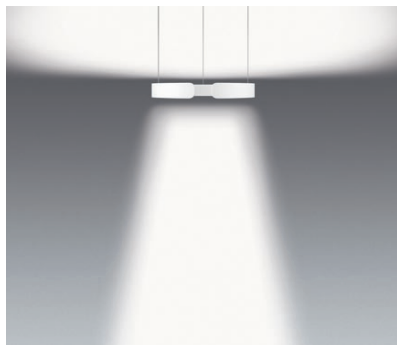

room (narrow)

concentrated light downwards, beam angle approx. 50°, diffuse upwards

inserts: narrow / diffuse

luminous flux : high color 60 W 3210 lm

UGR (4H8H) < 19

control options

Control

Mito set box (standard)



sospeso / volo

soffitto / alto flat

sfera



alto & alto side

sospeso / volo / sfera:

COLOR (Sensor off)
adjustable color temperature (4 steps)
trailing-edge phase cut dimming possible

STEP (sospeso / volo)

adjustable color temperature (4 steps)
adjustable up / downlight ratio (5 steps)
trailing-edge phase cut dimming possible

PRESET (sfera)

color temperature adjustable (4 stages)
light intensity adjustable (5 stages)

SENSOR

»touchless control« (gesture control)
switching, dimming, up / down fading
»color tune« (color temperature continuously adjustable)
no external dimming possible

* not with sfera

alto / alto side:

COLOR
adjustable color temperature (4 steps)
trailing-edge phase cut dimming possible

Mito »air« box (optional)



sospeso / volo / sfera



alto & alto side



terra / terra 3d
terra table top /
soffitto / alto flat



Occhio air (Bluetooth control using Occhio air app) or air controller (optional) control of individual luminaires, groups and scenes

sospeso / volo / sfera:

SENSOR
»air« + »touchless control« (Bluetooth- and gesture control)
control via »touchless control« and Occhio air app or »air« controller

SENSOR OFF

»air«
control via Occhio air App or »air« controller switching, dimming, up / down fading, »color tune« (color temperature continuously adjustable)

terra / terra 3d / terra table top:

»air«, »touchless control« and »body sensor« (Bluetooth- and gesture control)
control via »touchless control«, »body sensor« and Occhio air App or »air« controller

alto / alto slide:

»air« (Bluetooth - control)
control via Occhio air App or »air« controller switching, dimming
»color tune« (color temperature continuously adjustable)

»ambient light control«
adjustment to ambient light

»presence sensor«
presence identification and automatically shutdown by presence sensor


deactivation and adjustable via control and sensor with »air« app

with Mito »air« box no external dimming possible

Mito DALI box (optional)



sospeso / volo /
soffitto alto flat



alto & alto side up



alto & alto side track

control via DALI

sospeso / volo / soffitto / alto flat:

- color tune adjustable
- adjust continuously dimming
- up + downlight separate controllable (two DALI addresses needed)
- no »touchless control«, no fading
- volo 100 (max. 22,5W uplight/ 22,5W downlight)
- volo 140 (max. 30W uplight/max. 30W downlight)

alto / alto side:

- color tune adjustable*
- continuously dimming

* DALI controller DALI Device type 8 (DT8) for controlling of the color tune necessary further signs on www.occhio.de/dali

Mito sospeso 60 var up DALI connection diagram

A maximum of 32 Mito sospeso units can be assigned to each DALI circuit.

The Mito sospeso requires two DALI addresses per luminaire, which enables control of the top and bottom sides via their own respective DALI address. The maximum output is reached if both DALI luminaires (top and bottom side) are set to maximum brightness (40 W = 20 W up and 20 W down; 60 W = 30 W up and 30 W down).

The Mito sospeso units can be organized into as many as 16 groups and equipped with an additional 16 scenarios (predefined settings).

Using a DALI short address, they can be actuated and configured individually. In addition, the bi-directional data transfer lets users query the state/status of individual luminaires.

You can find more detailed information at www.occhio.de/dali.

