


## Mito sospeso due 40 fix datasheet

Annular LED suspended luminaire with double-sided light emission and a diameter of 40 cm each. There is a choice of two lighting effects. table (wide) for use over tables – wide light beam downwards and upwards. room (narrow) for freely suspended luminaire lighting – concentrated light beam directed downwards, diffused light directed upwards. The maximum suspension length is 350 cm (can be adjusted during fitting).

Version with integrated power supply unit for mounting on plaster surfaces; connection to 230V AC mains voltage. Can be controlled via »touchless control« (gesture control on the head) and Occhio air; alternatively, dimmable via a trailing-edge phase cut dimmer\*. The color temperature can be continuously controlled via »touchless control« or Occhio air from 2700 to 4000 K or can be preset (2700/3000/3500/4000 K).

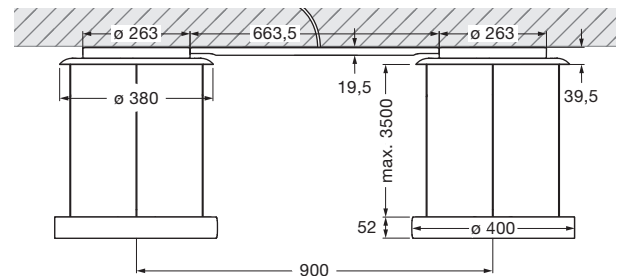

incl. power supply unit (removable)  
Mito connexion L 663.5 × W 114.5 × H 19.5

dimensions in mm

### technical data Mito sospeso due 40 fix

properties	material	aluminium, painted, PVD-coated steel, plastic, optical silicone, polyurethane, fibreglass
	height setting	max. 3500 mm (can be adjusted during fitting)
	weight	9.0 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom
	canopy / conexión	matt white
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	A +
	power	2 × 40 W (incl. Occhio power supply unit approx. 46 W)
	color rendering index	high color; CRI Ra 95
	color temperature	2700–4000 K
	recommended use	residential and commercial
electricity	dimming	»touchless control« and Occhio air (optional) or via trailing-edge phasecut dimmer*
	connection	230 V AC
	permitted operating conditions	max. 30°C for indoor use only

\* For a list of compatible dimmers, see [www.occhio.de/dim\\_en](http://www.occhio.de/dim_en), trailing-edge phasecut dimmer and Occhio air not combinable



## Mito sospeso due 40 fix lighting effects




### table (wide)

wide light beam (up and down), beam angle approx. 80° (down)

inserts: wide / flood

luminous flux : high color 2 x 40 W 2220 lm

UGR (4H8H) < 19

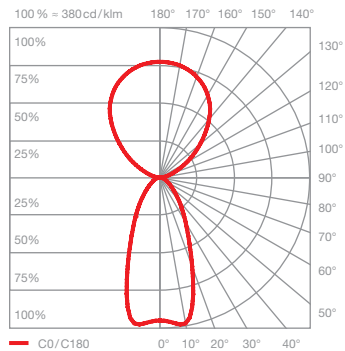

### room (narrow)

concentrated light downwards, beam angle approx. 50°, diffuse upwards

inserts: narrow / diffuse

luminous flux : high color 2 x 40 W 2140 lm

UGR (4H8H) < 19

## control options

### Control

#### Mito set box (standard)



sospeso / volo

soffitto / alto flat

sfera



alto & alto side

#### sospeso / volo / sfera:

COLOR (Sensor off)  
adjustable color temperature (4 steps)  
trailing-edge phase cut dimming possible

#### STEP (sospeso / volo)

adjustable color temperature (4 steps)  
adjustable up / downlight ratio (5 steps)  
trailing-edge phase cut dimming possible

#### PRESET (sfera)

color temperature adjustable (4 stages)  
light intensity adjustable (5 stages)

#### SENSOR

»touchless control« (gesture control)  
switching, dimming, up / down fading  
»color tune« (color temperature continuously adjustable)  
no external dimming possible

\* not with sfera


#### alto / alto side:

COLOR  
adjustable color temperature (4 steps)  
trailing-edge phase cut dimming possible

#### Mito »air« box (optional)



sospeso / volo / sfera



alto & alto side



terra / terra 3d  
terra table top /  
soffitto / alto flat



**Occhio air** (Bluetooth control using Occhio air app) or air controller (optional) control of individual luminaires, groups and scenes

#### sospeso / volo / sfera:

SENSOR  
»air« + »touchless control« (Bluetooth- and gesture control)  
control via »touchless control« and Occhio air app or »air« controller

#### SENSOR OFF

»air«  
control via Occhio air App or »air« controller switching, dimming, up / down fading, »color tune« (color temperature continuously adjustable)

#### terra / terra 3d / terra table top:

»air«, »touchless control« and »body sensor« (Bluetooth- and gesture control)  
control via »touchless control«, »body sensor« and Occhio air App or »air« controller

#### alto / alto slide:

»air« (Bluetooth - control)  
control via Occhio air App or »air« controller switching, dimming  
»color tune« (color temperature continuously adjustable)

»ambient light control«  
adjustment to ambient light

»presence sensor«  
presence identification and automatically shutdown by presence sensor


deactivation and adjustable via control and sensor with »air« app

with Mito »air« box no external dimming possible

#### Mito DALI box (optional)



sospeso / volo /  
soffitto alto flat



alto & alto side up



alto & alto side track

#### control via DALI

#### sospeso / volo / soffitto / alto flat:

- color tune adjustable
- adjust continuously dimming
- up + downlight separate controllable (two DALI addresses needed)
- no »touchless control«, no fading
- volo 100 (max. 22,5W uplight/ 22,5W downlight)
- volo 140 (max. 30W uplight/max. 30W downlight)

#### alto / alto side:

- color tune adjustable\*
- continuously dimming

\* DALI controller DALI Device type 8 (DT8) for controlling of the color tune necessary further signs on [www.occhio.de/dali](http://www.occhio.de/dali)